



PNEUMATICALLY OPERATED • SOFT CLAMPING FEATURE • SMALL TABLE-TOP FOOT PRINT • DUAL FUNCTION FOOT PEDAL • SINGLE & MULTIPLE STACK

AMP

U-300 Frame **Joining Capabilities**

(Formerly Model Minigraf 3)

Moulding Width

(min to max) 1/4" to 2 3/8" (6 to 60mm)

Moulding Height

(min to max) 1/4" to 3 1/4" (6 to 80mm)

Max Distance Between V-Nails (Stroke)

3 1/4" (80mm)

Pre-set V-Nail Position Stops Multiple

V-Nail Sizes

3, 5, 7,10,12,15mm (SW-HW-HDF)

V-Nail Channel Capacity 220 V-Nails



U-300 Semi-Auto/Pneumatic Underpinner

Our *U-300* is a bench top frame joining machine and the most popular model with the custom frame shops. It is compact, well constructed and built for many years of trouble free operation. The design of the U-300 allows the framer to set the front and back stops for V-Nail insertion. The frame is then moved across the nail head and V-Nails are driven or stacked anywhere along the frame joint. The V-Nail insertion is actuated through the use of a pneumatic pedal.







PNEUMATICALLY OPERATED • SOFT CLAMPING FEATURE • SMALL TABLE-TOP FOOT PRINT • DUAL FUNCTION FOOT PEDAL • SINGLE & MULTIPLE STAC

Frame Joining Capabilities:

Moulding Width (min to max) 1/4" to 2 3/8" (6 to 60mm)

Moulding Height (min to max) 1/4" to 3 1/4" (6 to 80mm) **Max Distance Between** V-Nails (Stroke) 3 1/4" (80mm)

Pre-set V-Nail Position Stops Multiple

V-Nail Sizes 3, 5, 7,10,12,15mm (SW-HW-HDF)

V-Nail **Channel Capacity** 220 V-Nails

Clamping Pad System





- Improves clamping by incorporating pre-drilled positioning adjustments
- Spring loaded pull pin locking mechanism eliminates slippage wear on vertical rod and allows quick adjustments



Enables a quick change to a different clamping pad depending on joining applications



- All clamping pads are interchangeable with magnetic, single and double metal pressure plates
- Three different pads are available based on moulding hardness, contour, finishes or coatings

U-300 Unique Performance Features


- · Features pneumatic loader to eliminate nail jams
- "Soft Clamping" pneumatic feature for damage free joints
- Quick-change magnetic pad hold down feature fitting most moulding profiles
- Small table-top foot print needed 305mm (12") wide x 483mm (19") length x 356mm (14") high
- Operates only with pneumatic air, no electrical hook-up needed
- Dual function foot pedal for separate control of mould clamping and V-Nail insertion
- Designed with a unique trouble free piston V-Nail driver block-blade system for years of dependable single and multi-stacking operations
- **CE Compliant**

Machine Dimensions & Weight

Length: 19"(485mm) Width: 11 3/4" (300mm) Height: 18" (456mm) Weight: 70 lbs. (32 kg.)

Compressed Air Requirements

3NI at 5 Bar

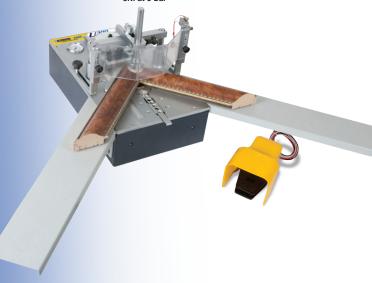

U-300 Underpinner

Part No Information

Semi-Auto/Pneumatic

(Formerly Model Minigraf 3)

U-300 Purchase Package

(1) 7mm Nail Head

Part # 04-001

- (1) 10mm Nail Head
- 12mm Nail Head
- Fixed Fence 90° (1)
- Single Vertical Positive Placement Clamp
- Magnetic Base for Clamp Assembly
- Single Metal pressure plate
- Blue Rubber Pad (SW)
- Yellow Rubber Pad (MW)
- Black Rubber Pad (HW)
- (1) Round Pressure pad Felt
- (1) Front Horizontal Clamp
- 4mm Allen wrench 5mm Allen wrench
- (1) Machine Manual w/warranty card

Accessories & Replacement Items

04-032 Extension Wings Kit

04-167 Magnetic Base for Clamp Assembly

Single Vertical Positive Placement Clamp 41-221

04-047 Floor Stand Option

04-020 Single Metal Pressure Plate

Magnetic - Single Metal Pressure Plate 04-023

04-026 Blue Replacement Rubber Pad (recommended for SW)

Yellow Replacement Rubber Pad 04-025

(recommended for MW)

Black Replacement Rubber Pad 04-024

(recommended for HW)

Adjustable Fence (2 Knobs)

41-333 Fixed Fence - 120°

41-334 Fixed Fence - 135°

04-090 Nail Head - 3mm 04-095 Nail Head - 5mm

04-091 Nail Head - 7mm

04-092 Nail Head - 10mm

04-093 Nail Head - 12mm

04-094 Nail Head - 15mm

AMP "Power Twist®" pulling power V-Nails are designed to improve the mitre joint quality for framed art or woodworking type assemblies. Available in 3, 5, 7, 10, 12, and 15 mm sizes. Offered in convenient packages for the custom framers or large volume production package for use with softwood, hardwood, MDF and plastic framing materials.

For OEM inquiries contact our OEM Framing Group at 847.821.2170

